


INSTRUCTION

1. ALL DRAWER CONSTRUCTION MUST COMPLY WITH THIS SPECIFICATION.
2. ALL CONSTRUCTION MUST COMPLY WITH ENGINEERING CODE OF PRACTISE.

CONDITIONS :

1. ALL DIMENSIONS IN MILIMETER (MM)
2. ALLOWABLE EXTENSION MUST BE NOT MORE THAN
 - A. 1000MM; OR
 - B. 80% OF WHEELBASE MEASURED FROM CENTRE OF REAR TYRE TO END POINT OF DRAWER
3. HEIGHT & WIDTH OF DRAWER MUST BE SAME WITH SIDE GATE & TAIL GATE
4. INSTALLATION OF EXTENSION STEEL MUS BE EQUIPED WITH SAFETY LOCK TO AUTOMATICALLY LOCK WHEN IT IS PULLED TO MAXIMUM ALLOWABLE EXTENSION
5. MINIMUM 3 LOCK PINS MUST BE PROVIDED ON EXTENSION STEEL & FLOOR BODY SUB-FRAME
6. THE SIZE FOR EXTENSION REAR LIGHT/DIRECTION INDICATOR / BRAKE LIGHT MUST BE BIGGER THAN ORIGINAL TAIL LIGHT
7. ELECTRIAL WIRE MUST BE INSULATED ANI PROPERLY INSTALLED
8. DRAWER & EXTENSION STEEL MUST BE PAINTED WITH WHITE FLUORESCENT COLOR.

APPROVED BY



29 JAN 2015

DATO' IR. HJ. MOHAMAD BIN DALIB
DIRECTOR
AUTOMOTIVE ENGINEERING DIVISION
JPJ, MALAYSIA

TITLE :


PROPOSED DWG FOR INSTALLATION OF REAR DRAWER

RIGID DECONTROLLED BDM 2500KG TO 5000KG

PREPARED BY :

AUTOMOTIVE ENGINEERING DIVISION
ROAD TRANSPORT DEPARTMENT
MALAYSIA

DATE : 04 FEBRUARY 2015

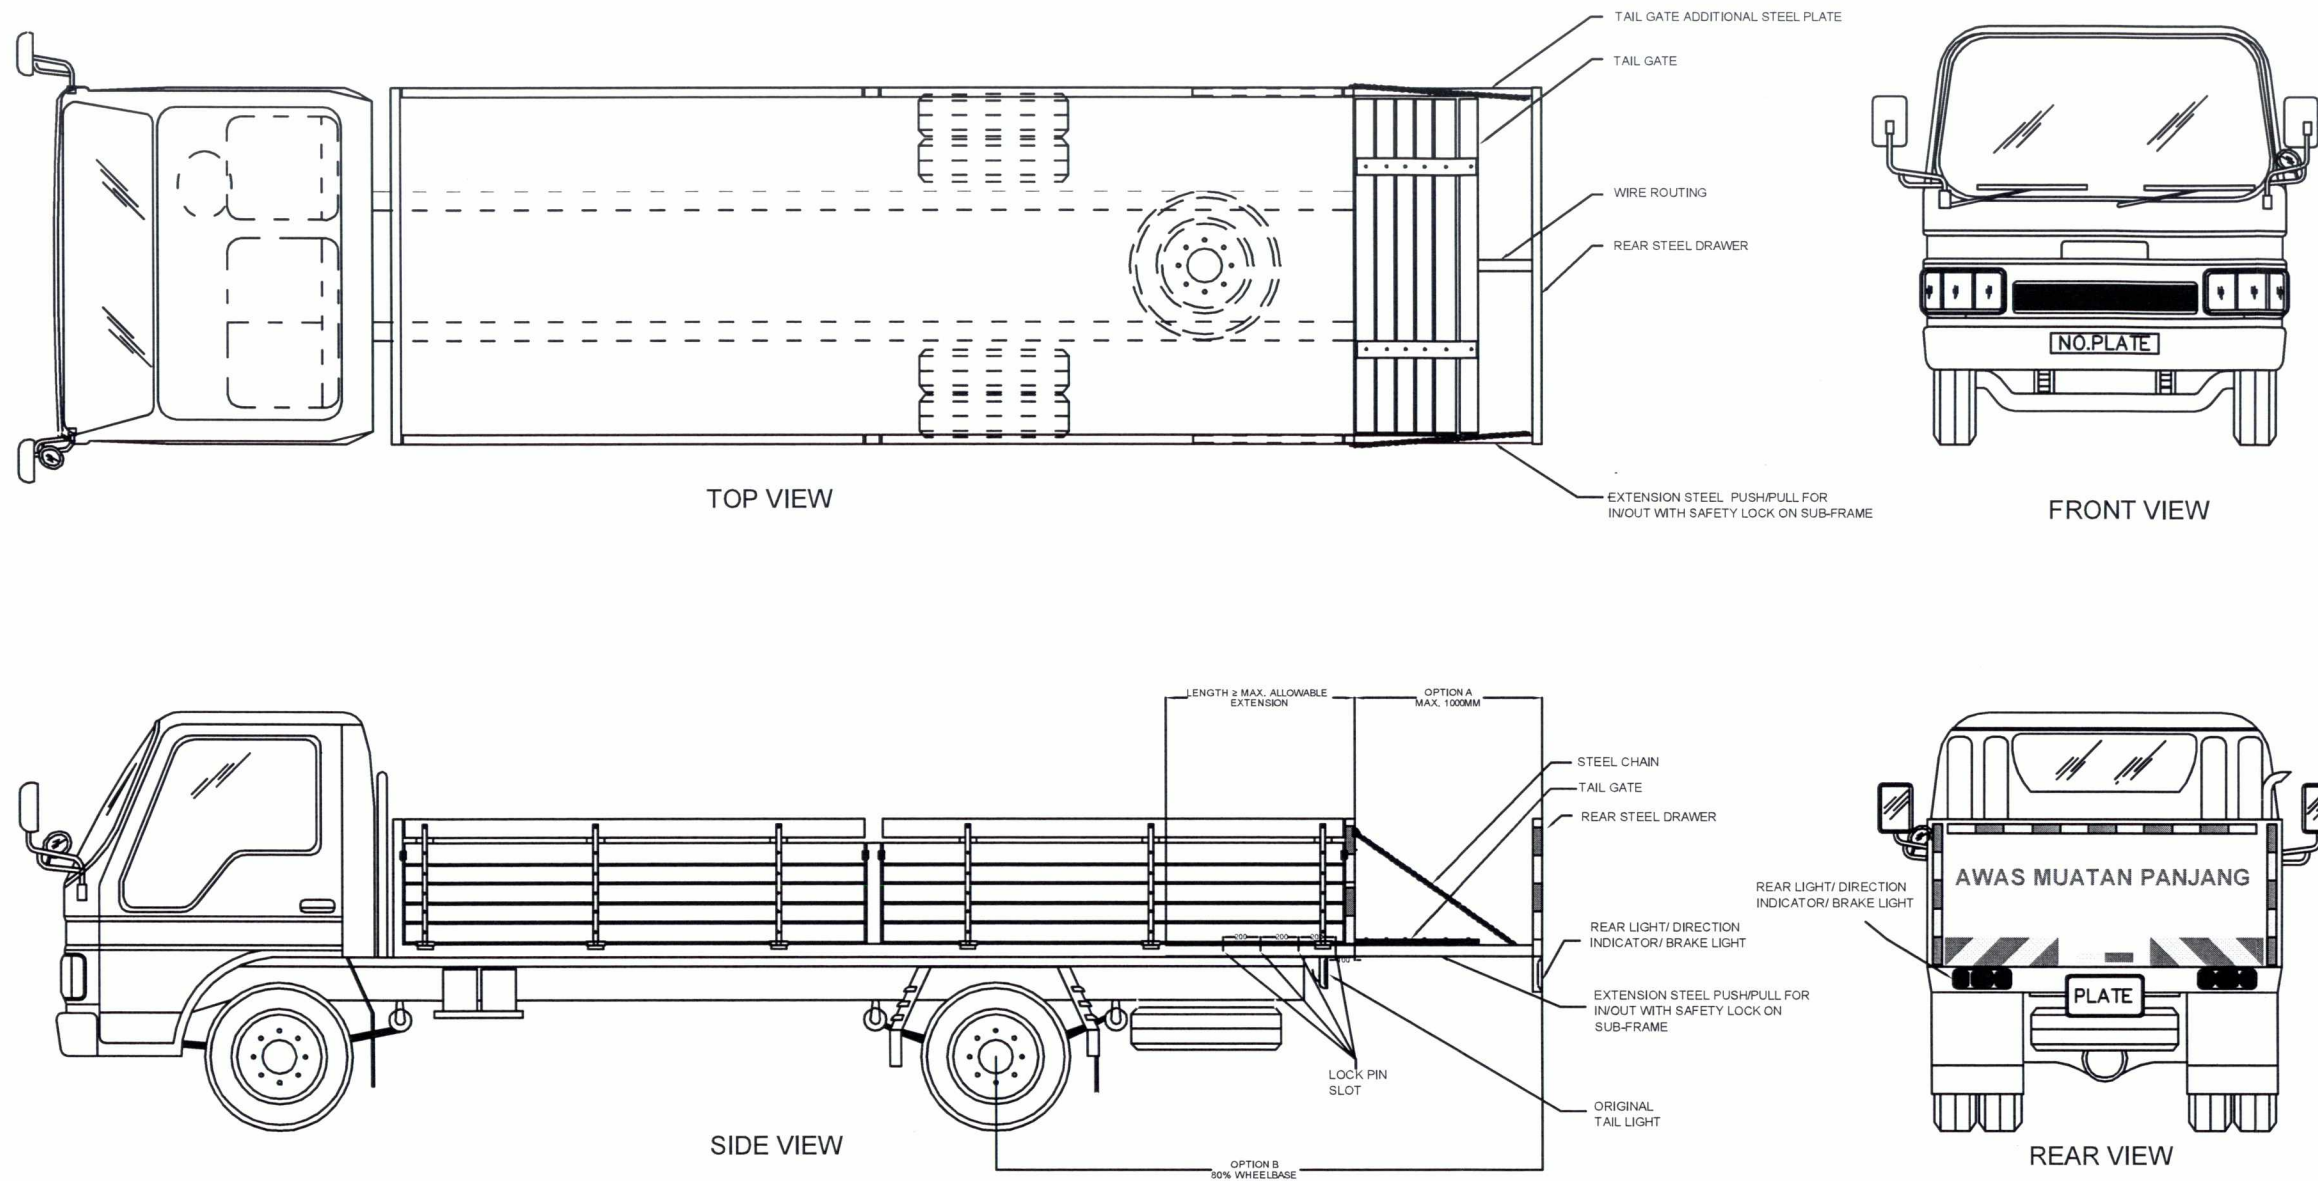

REAR VIEW OF DRAWER

SIDE VIEW OF DRAWER

DIMENSION REFLECTIVE STICKER

